


Approved Tremco Sealant (Dymonic 100 or Vulkem 45SSL)  
 Sealant to be recessed 2-3mm from face of joint to protect from mechanical damage.  
 Joint width should be 4 times anticipated movement, but not less than 6mm. Consult  
 Tremco for joints wider than 25mm

Specified Tremco waterproofing system,  
 applied to prepared and primed substrate.



Install backing rod (or bond breaker tape), to control sealant depth,  
 as per requirements on the relevant product data sheet, prior to  
 installation of approved Tremco sealant.

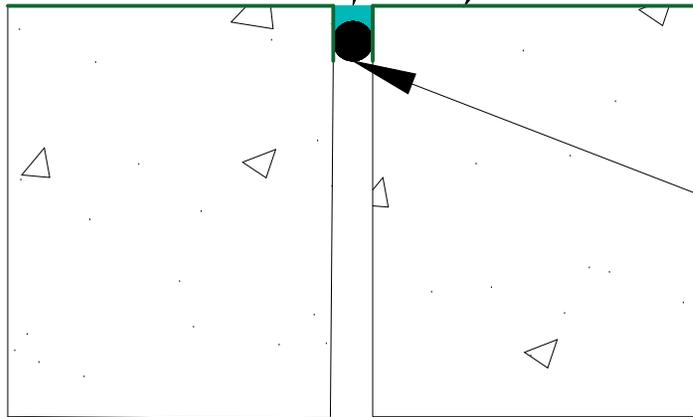

Construction Products Group  
 www.tremco.com.au  
 12/4 Southridge St, Eastern Creek  
 Phone : (02) 9638 2755 \* Fax: (02) 9638 2955

Project: Standard Detail  
 Detail: Sealant- Movement Joint  
 This detail is intended for conceptual purposes only.

Drawn by: PM

Checked by: XX

Scale: None

Sheet Number:  
 Date: 30/10/20

File Name:  
 Tremco- Standard  
 Detail

Rev #:  
 04