


TREMcrete HB Ultra, (min 30x30 reglet)
 Note: Active leaks should be plugged
 with **TREMcrete Plug**.



TREMcrete HB Ultra, cove

TREMcrete NWP, applied to a minimum
 thickness of 5mm

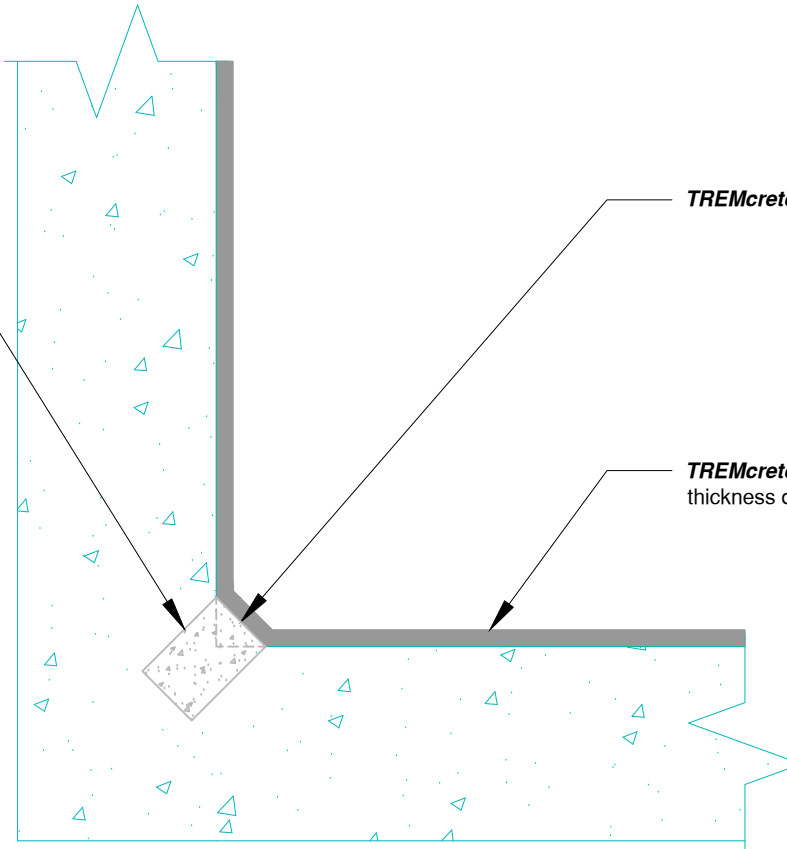

Construction Products Group
 www.tremco.com.au
 12/4 Southridge St, Eastern Creek
 Phone : (02) 9638 2755 * Fax: (02) 9638 2955

Project: Standard Detail
 Detail: TREMcrete NWP- Negative Waterproofing- Floor/ Wall Junction

Sheet Number:

File Name:
 Tremco- Standard
 Detail

Rev #:
 02

This detail is intended for conceptual purposes only.

Drawn by: PM

Checked by: XX

Scale: None

Date: 12/06/20