

POLYshim II Tape

Chemically compatible glazing tapes for use with Tremco sealants

PRODUCT DESCRIPTION

POLYshim II Tape is a 100% solids, highly adhesive and elastic, cross linked butyl preformed tape with a continuous integral EPDM shim.

USAGE/PURPOSE

Typical applications for Tremco POLYshim II tape include:

- Compression glazing for high performing:
 - Stick and Frame Curtain-Wall
 - Unitised Curtain Wall
 - Punched Open Window Systems
 - Ribbon Window Systems
 - Sloped Glazing Applications

PACKAGING

- □ 3.8 mm x 9.5 mm tape x 243 metres per carton with 3.2 mm shim diameter
- □ 5.5 mm x 9.5 mm tape with 152 metres per carton with 4.8 mm shim diameter
- □ 7.1 mm x 9.5 mm tape with 121 metres per carton with 6.4 mm shim diameter

COLOUR

Black

SHELF LIFE

12 months when stored as recommended in original unopened packaging.

STORAGE

Store in a dry cool place in an upright position in original, undamaged packaging.

LIMITATIONS

- Not for use in joints subjected to continuous water immersion or temperatures exceeding 70°C.
- □ A compatibility test is required when used in conjunction with sealants other than approved Tremco silicone sealants.

HEALTH & SAFETY PRECAUTIONS

The Safety Data Sheet (SDS) must be read and understood prior to use.


TECHNICAL SERVICE

Tremco CPG Australia Pty Ltd has a team of Representatives who provide assistance in the selection and specification of products. For more detailed information or service and advice, call Customer Service on (02) 9638 2755 or fax (02) 9638 2955.

GUARANTEE/WARRANTY

Tremco CPG Australia Pty Ltd products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG Australia written instructions and (b) in any application recommended by Tremco CPG Australia, but which is proved to be defective, will be replaced free of charge.

Any information provided by Tremco CPG Australia in this document in relation to Tremco CPG Australia's goods or their use is given in good faith and is believed by Tremco CPG Australia to be appropriate and reliable. However, the information is provided as a guide only, as the actual use and application will vary with application conditions which are beyond our control. Tremco CPG Australia makes no representation, guarantee or warranty relating to the accuracy or reliability of the information and assumes no obligation or liability in connection with the information. To the extent permitted by law, all warranties, expressed or implied are excluded.

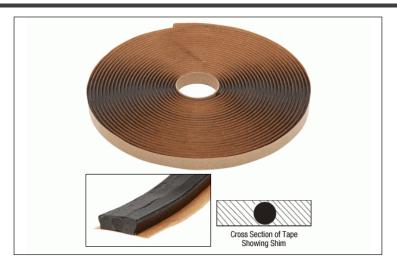

CONTACT OUR TEAM

Tremco CPG Australia Pty Ltd ABN: 25 000 024 064 Unit 12, 4 Southridge Street Eastern Creek, NSW 2766

P: (02) 9638 2755 F: (02) 9638 2955 E: tremco@tremco.com.au

PSII 004-1122

TREMCO TDryvit TNudura TWillseal Flowcrete Hillbruck Nullifire Vandex