

PRODUCT DESCRIPTION

TREMproof FBM Plus Double Sided Tape is a self-adhering waterproofing sealing tape. It primarily consists of butyl rubber as its main ingredient. Possessing a remarkably strong adhesive force to various surfaces, it exhibits exceptional weather resistance, resistance to aging and impermeability to water. This double sided tape serves the purposes of sealing, damping and protecting the adherent surface. It is solvent-free, eliminating any possibility of shrinkage and showcases outstanding capability in accommodating thermal expansion, contraction and mechanical deformation of the adherent surface.

USAGE/PURPOSE

TREMproof FBM Plus DS Tape is used for sealing overlapping transitions of the TREMproof FBM Plus Roll applications.

PACKAGING

- ☐ Roll Size: 80mm (W) x 50m (L) x 0.4mm (T)
- ☐ 12 Rolls per box

COLOUR

White

SHELF LIFE

12 months

STORAGE

Store in well-ventilated and dry location. Storage temperature should be below 45°C and kept away from direct sunlight, rain and high temperature. Avoid contact with acids, alkali, oils and organic solvents.

LIMITATIONS


- ☐ Do not apply at temperatures below 5°C. Reduced adhesion may occur at lower temperatures.
- ☐ Substrate must be clean, dry and free from dust, laitance, oil, grease or other contaminants that may affect adhesion.
- ☐ Application to damp, wet or contaminated surfaces may result in reduced bond performance.
- ☐ Adequate pressure must be applied to ensure full contact and adhesion of the tape to the substrate.
- ☐ Product is designed for use as part of the TREMproof FBM Plus system and should be used in accordance with system installation guidelines.

INSTALLATION

1. Clean the base material to ensure the surface of the bonded base material is free of floating ash and water stain or wipe the surface with a rag.
2. Take the adhesive tape with appropriate length, tear off the release liner, use a pressing plate to roll the base material and adhesive tape to remove the air and bond tightly.

TYPICAL PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	RESULT
Peel Adhesion	ASTM D1876	0.8 N/mm

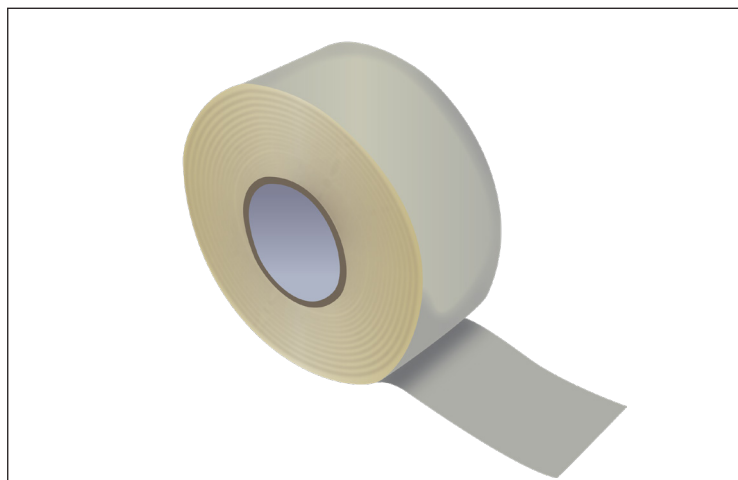

HEALTH & SAFETY PRECAUTIONS

The Safety Data Sheet (SDS) must be read and understood prior to use.

TECHNICAL SERVICE

Tremco CPG Australia Pty Ltd has a team of Representatives who provide assistance in the selection and specification of products. For more detailed information or service and advice, call Customer Service on (02) 9638 2755 or fax (02) 9638 2955.

GUARANTEE/WARRANTY

Tremco CPG Australia Pty Ltd products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG Australia written instructions and (b) in any application recommended by Tremco CPG Australia, but which is proved to be defective, will be replaced free of charge.

Any information provided by Tremco CPG Australia in this document in relation to Tremco CPG Australia's goods or their use is given in good faith and is believed by Tremco CPG Australia to be appropriate and reliable. However, the information is provided as a guide only, as the actual use and application will vary with application conditions which are beyond our control. Tremco CPG Australia makes no representation, guarantee or warranty relating to the accuracy or reliability of the information and assumes no obligation or liability in connection with the information. To the extent permitted by law, all warranties, expressed or implied are excluded.

CONTACT OUR TEAM

Tremco CPG Australia Pty Ltd
ABN: 25 000 024 064
Unit 12, 4 Southridge Street
Eastern Creek, NSW 2766

P: (02) 9638 2755
F: (02) 9638 2955
E: tremco@tremco.com.au