

VULKEM NEM

One Part, Single Coat Application,
Polyurethane Waterproofing Membrane

Product Overview

Vulkem NEM is a single component, moisture curing, high tensile strength and tough curing polyurethane membrane that has been a market leader in Australia for more than 20 years.


Single coat application makes Vulkem NEM ideal for internal and external areas where fast pace construction occurs.



Product	Coverage Rate		Thickness	
Vulkem NEM	0.8m ² /L	15m ² /Pail	1.2mm WFT	1.0mm DFT

Features & Benefits

- Tested successfully to AS 4654.1 and AS4858 ensures it meets the requirements set forth by the National Construction Code of Australia.
- Class III membrane allows for high flexibility and movement accommodation.
- Single Coat horizontal application eliminates the risk of membrane delamination between layers.

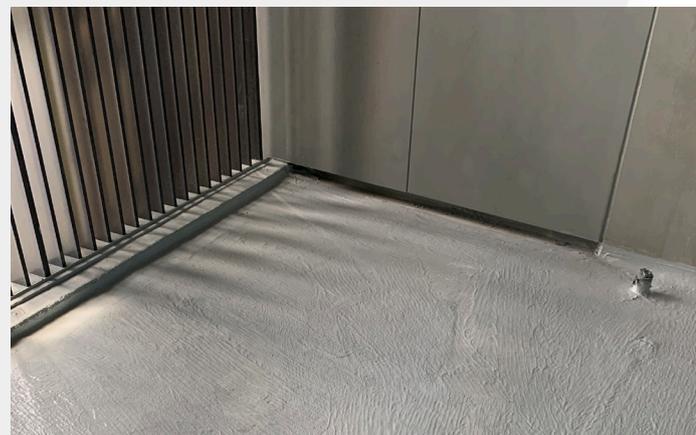

Application Areas

Vulkem NEM may be used to apply a seamless, monolithic waterproof membrane to a variety of substrates in areas such as:

- Showers
- Bathrooms
- Balconies
- Terraces
- Other areas which are to be tiled and protected from UV and traffic

Approximate Cure Times


Temperature at 50% RH °C	Vulkem NEM (hours)
4.4 - 12.8	24 - 96
12.8 - 18.3	6 - 24
18.3 - 29.4	4 - 6
29.4	< or = 4



One Part, Single Coat Application,
Polyurethane Waterproofing
Membrane

Limitations

- Not to be used as a trafficable or UV stable waterproof membrane.
- Not to be used below grade.
- Do not apply to damp or contaminated surfaces.

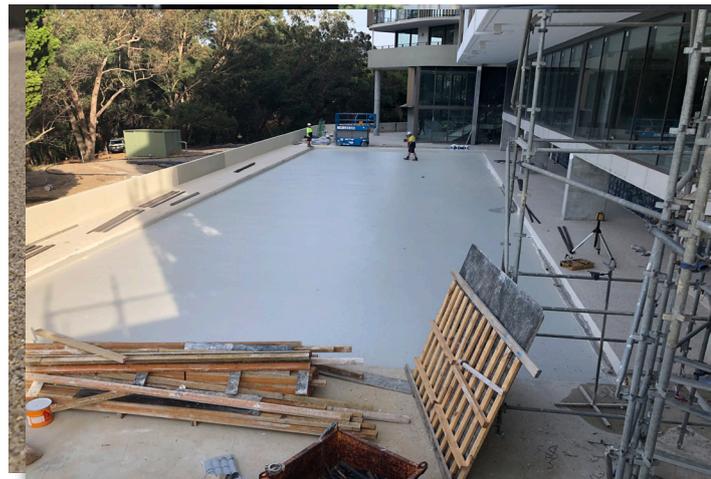

Tremco Construction Products Group (CPG) represents the combined power of brands including Willseal and Tremco, along with Tremco CPG affiliates Flowcrete, illbruck, Nullifire, and Euclid Chemical.

