TREMCO
Construction Products Group

Presstite FR

Polyurethane Foam Sealing Strip For Bushfire Prone Areas

PRODUCT DESCRIPTION

Presstite FR is an impregnated flexible polyurethane foam sealing strip. Presstite FR expands and contracts to accommodate movement, acting as a gasket or sealant to reduce noise, to stop light draughts, dust, dirt, and light rain water from entering building constuctions in leisure, domestic, commercial or industrial installations.

USAGE/PURPOSE

Expansion joints precast

- ❑ Concrete slabs, block and brick work

Precast

- ❑ Concrete Panels

Roofs

- ❑ Domes, Skylights and Vents

Sheetmetal Roofing

- ❑ Profile for sealing at parapets,over plates, side and end laps

Windows and Doors Frames

- ❑ Timber, masonry and metal

FEATURES & BENEFITS

- ❑ Easy Installation
- ❑ Assessed to AS 1530.8, for a BAL40 exposure. Consult Tremco Technical Services for further information.
- ❑ Windproof

COLOUR

Black

PACKAGING

50mm x 50mm
Profile D

TYPICAL PROPERTIES	
Property	**Result**
Density	95 Kg/m^3
Resilience	28%
Tensile Strength	89KPa
Elongation	90%
Tear Strength	267 N/m
Compression Set, 75%	58% at 70°C

INSTALLATION

Presstite FR is to be applied with the foil side facing out of the roof and set back approximately 20mm from the roof or ridge cap edge.

CUTTING AND JOINING

Presstite FR can be cut with a wet knife or scissors at an angle of 45° and spliced, cut should be made at the trough of the corrugated profile.

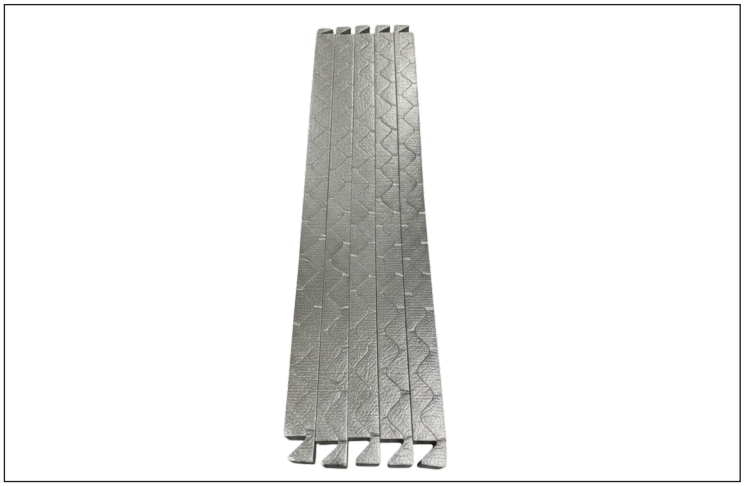

CHECK THE SEAL

After fitting check that Presstite FR is uniformly and properly compressed with no gaps.

HEALTH & SAFETY PRECAUTIONS

The Safety Data Sheet (SDS) must be read and understood prior to use.

TECHNICAL SERVICE

Tremco CPG Australia Pty Ltd has a team of Representatives who provide assistance in the selection and specification of products. For more detailed information or service and advice, call Customer Service on (02) 9638 2755 or fax (02) 9638 2955.

GUARANTEE/WARRANTY

Tremco CPG Australia Pty Ltd products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG Australia written instructions and (b) in any application recommended by Tremco CPG Australia, but which is proved to be defective, will be replaced free of charge.

Any information provided by Tremco CPG Australia in this document in relation to Tremco CPG Australia's goods or their use is given in good faith and is believed by Tremco CPG Australia to be appropriate and reliable. However, the information is provided as a guide only, as the actual use and application will vary with application conditions which are beyond our control. Tremco CPG Australia makes no representation, guarantee or warranty relating to the accuracy or reliability of the information and assumes no obligation or liability in connection with the information. To the extent permitted by law, all warranties, expressed or implied are excluded.

CONTACT OUR TEAM

Tremco CPG Australia Pty Ltd
ABN: 25 000 024 064
Unit 12, 4 Southridge Street
Eastern Creek, NSW 2766

P: (02) 9638 2755
F: (02) 9638 2955
E: tremco@tremco.com.au