



PRODUCT SELECTION GUIDE

Waterproofing



CONTACT US



TREMCO OFFICE LOCATIONS

New South Wales

Unit 12 / 4 Southridge Street
Eastern Creek NSW 2766
Tel: 1800 318 038

Queensland

63 Radley Street
Virginia QLD 4014
Tel: (07) 3889 9222

Victoria

34 Naxos Way
Keysborough Vic 3173
Tel: (03) 9799 3900

Western Australia

C/O DGL -105 Sheffield Road,
Welshpool WA 6106
Tel: 0431 365 708

PRODUCT SELECTION GUIDE WATERPROOFING



CONTENTS

▪ Product Selector	4
▪ Waterproofing Systems - Selection Guide.....	5-11
▪ Regulatory Compliance	12
▪ Quality Assurance Programme	13
▪ Standard Detail Drawings.....	15-18
▪ Online Product Selector.....	19
▪ Warranty	20-21
▪ Training Programme & CPD Presentations.....	22-23

This document is applicable to Tremco Australia waterproofing membrane systems for new construction and/or remedial purposes. Applicable areas may include; internal, external and below grade waterproofing applications.

The information contained within this document should be read in accordance with the information listed on the relevant Product Data Sheet, Australian Standard and National Construction Code.

All text contained in this document is provided as guidance by Tremco for developing the appropriate work section and relevant construction documents. Consult with Tremco for project specific advice and product suggestions.



1. Internal Wet Area



3. External Area - Pavers and Pedestal



5. External Area - UV Exposed, Pedestrian Traffic



7. External Area - Planter



2. External Area - Tile and Screed



4. External Area - Ballast Finish



6. External Area - UV Exposed, Non-trafficable (Pedestrian Service Traffic Only)



8. Below Grade

INTERNAL WET AREA							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	Moisture Cured Polyurethane	TREMproof 200EC	Vulkem NEM Plus	N/A	N/A	Below Screed-Floor	Maximum: 20 Years
	Water Based Modified Acrylic	TREMproof 200EC	Vulkem H2 Plus OR Vulkem H2 Rapid	N/A	N/A	Above Screed-Floor Walls	
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 2	Moisture Cured Polyurethane	TREMproof 200EC	Vulkem NEM Plus	N/A	N/A	Below Screed-Floor	Maximum: 15 Years
	Water Based Modified Acrylic	TREMproof 200EC	Vulkem H2 Plus OR Vulkem H2 Rapid	N/A	N/A	Walls	
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 3	Water Based Modified Acrylic	TREMproof 200EC	Vulkem H2 Plus OR Vulkem H2 Rapid	N/A	N/A	Floor (Above or Below Screed)	Maximum: 10 Years
	Water Based Modified Acrylic	TREMproof 200EC	Vulkem H2 Plus OR Vulkem H2 Rapid	N/A	N/A	Walls	
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	



WATERPROOFING SYSTEMS EXTERNAL AREA



WATERPROOFING SYSTEMS EXTERNAL AREA



EXTERNAL AREA - TILE AND SCREED							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	Moisture Cured Polyurethane	TREMproof 200EC	Vulkem NEM Plus	N/A	N/A	Below Screed	Maximum: 20 Years
	Water Based Modified Acrylic	TREMproof 200EC	Vulkem H2 Plus OR Vulkem H2 Rapid	N/A	N/A	Above Screed	
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 2	Moisture Cured Polyurethane	TREMproof 200EC	Vulkem NEM Plus	N/A	N/A	Below Screed	Maximum: 15 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 3	Water Based Modified Acrylic	TREMproof 200EC	Vulkem H2 Plus OR Vulkem H2 Rapid	N/A	N/A	Floor (Above or Below Screed)	Maximum: 10 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	

EXTERNAL AREA - PAVERS AND PEDESTAL							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	Fully Reinforced Polyurethane Membrane	TREMprime EP or TREMproof 200EC	AlphaGuard BIO Base Coat	AlphaGuard BIO Top Coat	Permafab	Waterproofing Membrane System	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 2	APP Torch On System	TREMproof Torch Bitumen Primer	TREMproof 3000	TREMproof 4000M	TREMproof Vent and Cap (Optional)	Waterproofing Membrane System	Maximum: 20 Years
Option 3	Hybrid Polyurea	TREMprime EP	TREMproof P85	Vulkem 346 or Vulkem 951NF	N/A	Waterproofing Membrane System	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 4	Single Ply PVC Membrane	N/A	TREMply PVC		N/A	N/A	Maximum: 20 Years
Option 5	Liquid Applied Polyurethane Membrane	TREMproof 200EC	Vulkem 350	Vulkem 346 or Vulkem 951NF	N/A	Waterproofing Membrane System	Maximum: 15 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 6	Moisture Cured Polyurethane	TREMproof 200EC	Vulkem NEM Plus	Vulkem 346 or Vulkem 951NF	N/A	Waterproofing Membrane System	Maximum: 10 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	

EXTERNAL AREA - BALLAST FINISH							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	Fully Reinforced Polyurethane Membrane	TREMprime EP or TREMproof 200EC	AlphaGuard BIO Base Coat	AlphaGuard BIO Top Coat	Permafab	Must be used in conjunction with suitable, free draining protection board	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 2	APP Torch On System	TREMproof Torch Bitumen Primer	TREMproof 3000	TREMproof 4000M	TREMproof Vent and Cap (Optional)	Must be used in conjunction with suitable, free draining protection board	Maximum: 20 Years
Option 3	Hybrid Polyurea	TREMprime EP	TREMproof P85	Vulkem 346 or Vulkem 951NF	N/A	Must be used in conjunction with suitable, free draining protection board. Top coat only required where membrane is UV exposed.	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 4	Modified Polyurethane	N/A	TREMproof 250GC	N/A	N/A	Must be used in conjunction with suitable, free draining protection board. Must not be UV exposed consult Tremco for project specific detailing advice.	Maximum: 20 Years depending on DFT, consult with Tremco
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 5	Single Ply PVC Membrane	N/A	TREMply PVC		N/A	N/A	Maximum: 20 Years
Option 6	Modified Polyurethane	N/A	TREMproof 201/60	N/A	N/A	Must be used in conjunction with suitable, free draining protection board. Must not be UV exposed consult Tremco for project specific detailing advice.	Maximum: 10 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	

WATERPROOFING SYSTEMS

EXTERNAL AREA



WATERPROOFING SYSTEMS

EXTERNAL AREA



EXTERNAL AREA - UV EXPOSED, PEDESTRIAN TRAFFIC							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	Hybrid Polyurea	TREMprime EP	TREMproof P85	Vulkem 951NF	N/A	N/A	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 3	Liquid Applied Polyurethane Membrane	TREMproof 200EC	Vulkem 350	Vulkem 951NF	N/A	N/A	Maximum: 15 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 4	Moisture Cured Polyurethane	TREMproof 200EC	Vulkem NEM Plus	Vulkem 951NF	N/A	N/A	Maximum: 10 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	

Note: Consult with Tremco regarding project specifics, where a UV exposed, pedestrian trafficable membrane is required.

EXTERNAL AREA - UV EXPOSED, NON-TRAFFICABLE (PEDESTRIAN SERVICE TRAFFIC ONLY)							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	Fully Reinforced Polyurethane Membrane	TREMprime EP or TREMproof 200EC	AlphaGuard BIO Base Coat	AlphaGuard BIO Top Coat	Permafab	Waterproofing Membrane System	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 2	APP Torch On System	TREMproof Torch Bitumen Primer	TREMproof 3000	TREMproof 4000M	TREMproof Vent and Cap (Optional)	Waterproofing Membrane System	Maximum: 20 Years
Option 3	Hybrid Polyurea	TREMprime EP	TREMproof P85	Vulkem 346 or Vulkem 951NF	N/A	Waterproofing Membrane System	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 4	Single Ply PVC Membrane	N/A	TREMply PVC		N/A	N/A	Maximum: 20 Years
Option 5	Liquid Applied Polyurethane Membrane	TREMproof 200EC	Vulkem 350	Vulkem 346 or Vulkem 951NF	N/A	Waterproofing Membrane System	Maximum: 15 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 6	Moisture Cured Polyurethane	TREMproof 200EC	Vulkem NEM Plus	Vulkem 346 or Vulkem 951NF	N/A	Waterproofing Membrane System	Maximum: 10 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	



WATERPROOFING SYSTEMS EXTERNAL AREA



WATERPROOFING SYSTEMS BELOW GRADE



EXTERNAL AREA - PLANTER							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	APP Torch On System	TREMproof Torch Bitumen Primer	TREMproof 3000	TREMproof Antiroot APP	N/A	Must be used in conjunction with suitable free draining protection board, with root resistant properties. In line with best practice, we recommend that only plants with non-invasive root systems be used within planters. Must not be UV exposed-consult Tremco for project specific detailing advice.	Maximum: 20 Years
Option 2	Hybrid Polyurea	TREMprime EP	TREMproof P85	TREMproof Antiroot Additive	N/A	Must be used in conjunction with suitable free draining protection board, with root resistant properties. In line with best practice, we recommend that only plants with non-invasive root systems be used within planters. Must not be UV exposed-consult Tremco for project specific detailing advice.	Maximum: 20 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 3	Modified Polyurethane	N/A	TREMproof 250GC	TREMproof Antiroot Additive	N/A	Must be used in conjunction with suitable, free draining protection board. In line with best practice, we recommend that only plants with non-invasive root systems be used within planters. Must not be UV exposed consult Tremco for project specific detailing advice	Maximum: 20 Years depending on DFT, consult with Tremco
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	
Option 4	Single Ply PVC Membrane	N/A	TREMply PVC		N/A	N/A	Maximum: 20 Years
Option 5	Modified Polyurethane	N/A	TREMproof 201/60R	TREMproof Antiroot Additive	N/A	Must be used in conjunction with suitable, free draining protection board. In line with best practice, we recommend that only plants with non-invasive root systems be used within planters. Must not be UV exposed consult Tremco for project specific detailing advice	Maximum: 10 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Floor/Wall Fillet Detailing Fillets	

EXTERNAL AREA - BELOW GRADE							
Option	Description	Primer	Base Coat	Top Coat	Ancillary Products	Specific Notes	Warranty
Option 1	HDPE/ Bentonite System	N/A	Paraseal LG	Paraseal Permanent Seam Tape	Paragranular and/or Paramastic	Saltwater Paraseal to be used in areas subject to brackish water.	Maximum: 20 Years
Option 2	APP Torch On System	TREMproof Torch Bitumen Primer	TREMproof 3000	TREMproof Antiroot APP	N/A	Must be used in conjunction with suitable, free draining protection board. Must not be UV exposed consult Tremco for project specific detailing advice.	Maximum: 20 Years
Option 3	Modified Polyurethane	N/A	TREMproof 250GC	TREMproof Antiroot Additive	N/A	Must be used in conjunction with suitable, free draining protection board. Must not be UV exposed consult Tremco for project specific detailing advice.	Maximum: 20 Years depending on DFT, consult with Tremco
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Detailing Fillet	
Option 4	Modified Polyurethane	N/A	TREMproof 201/60R	TREMproof Antiroot Additive	N/A	Must be used in conjunction with suitable, free draining protection board. Must not be UV exposed consult Tremco for project specific detailing advice.	Maximum: 10 Years
	Polyurethane Sealant	N/A	Dymonic 100	N/A	N/A	Detailing Fillet	





The table below provides a summary of Tremco Australia products, and their compliance with the Deemed to Satisfy Provisions for waterproofing as per the requirements of the National Construction Code.		
Product	Test Method	
	AS4858 Wet Area Membranes	AS4654.1 External Above Ground Membranes
Vulkem NEM Plus	✓	✓
Vulkem H2 Plus	✓	✓
Vulkem H2 Rapid	✓	✓
TREMproof P85	N/A	✓
Vulkem 350	N/A	✓
Vulkem 346	N/A	✓
Vulkem 951NF	N/A	✓
TREMproof 201/60	N/A	✓
TREMproof 250GC	N/A	✓
TREMproof 3000	N/A	✓
TREMproof 4000M	N/A	✓
TREMproof Anti Root	N/A	✓
AlphaGuard BIO Base Coast	N/A	✓
AlphaGuard BIO Top Coat	N/A	✓
TREMPly PVC	N/A	✓

QUALITY ASSURANCE PROGRAMME

By providing support throughout the construction process, supplying 'IAudit' observation reports as requested, Tremco hopes to decrease the number and severity of waterproofing defects that occur.

These observation reports allow Tremco CPG Australia to identify and document any necessary changes or corrective actions needed by the installer to achieve a successful and warrantable system.

Completed in real time, all vested parties (Applicator, Builder, Consultant etc.) have access to works as they are being observed by Tremco.

Tremco's Quality Assurance Programme requires the following points to be noted:



- As part of the general project prestart process, consideration should be given to what will be required/ expected for the frequency and timing of the observations to ensure the successful application of Tremco products.
- Standard periodical observations should be performed at a frequency either as a pre-agreed programme or booked by the Builder's site representative when required. It is requested as much notice be given as practical, ideally 1 week in advance.
- Areas suggested to be observed prior to work being undertaken include roof tops and podiums although may not be limited to these. Other areas of heightened concern are construction and movement joints which may also require added consultation and documentation.
- Should any concern or problem occur during the construction process, Tremco needs to be notified with the area of concern observed and relevant I Audit process followed and completed with all parties aware of any recommendations before works continues.
- Where possible, Tremco, the Builder and Contractor representatives attend at the time of all observations.



STANDARD DETAIL DRAWINGS




STANDARD DETAIL DRAWINGS

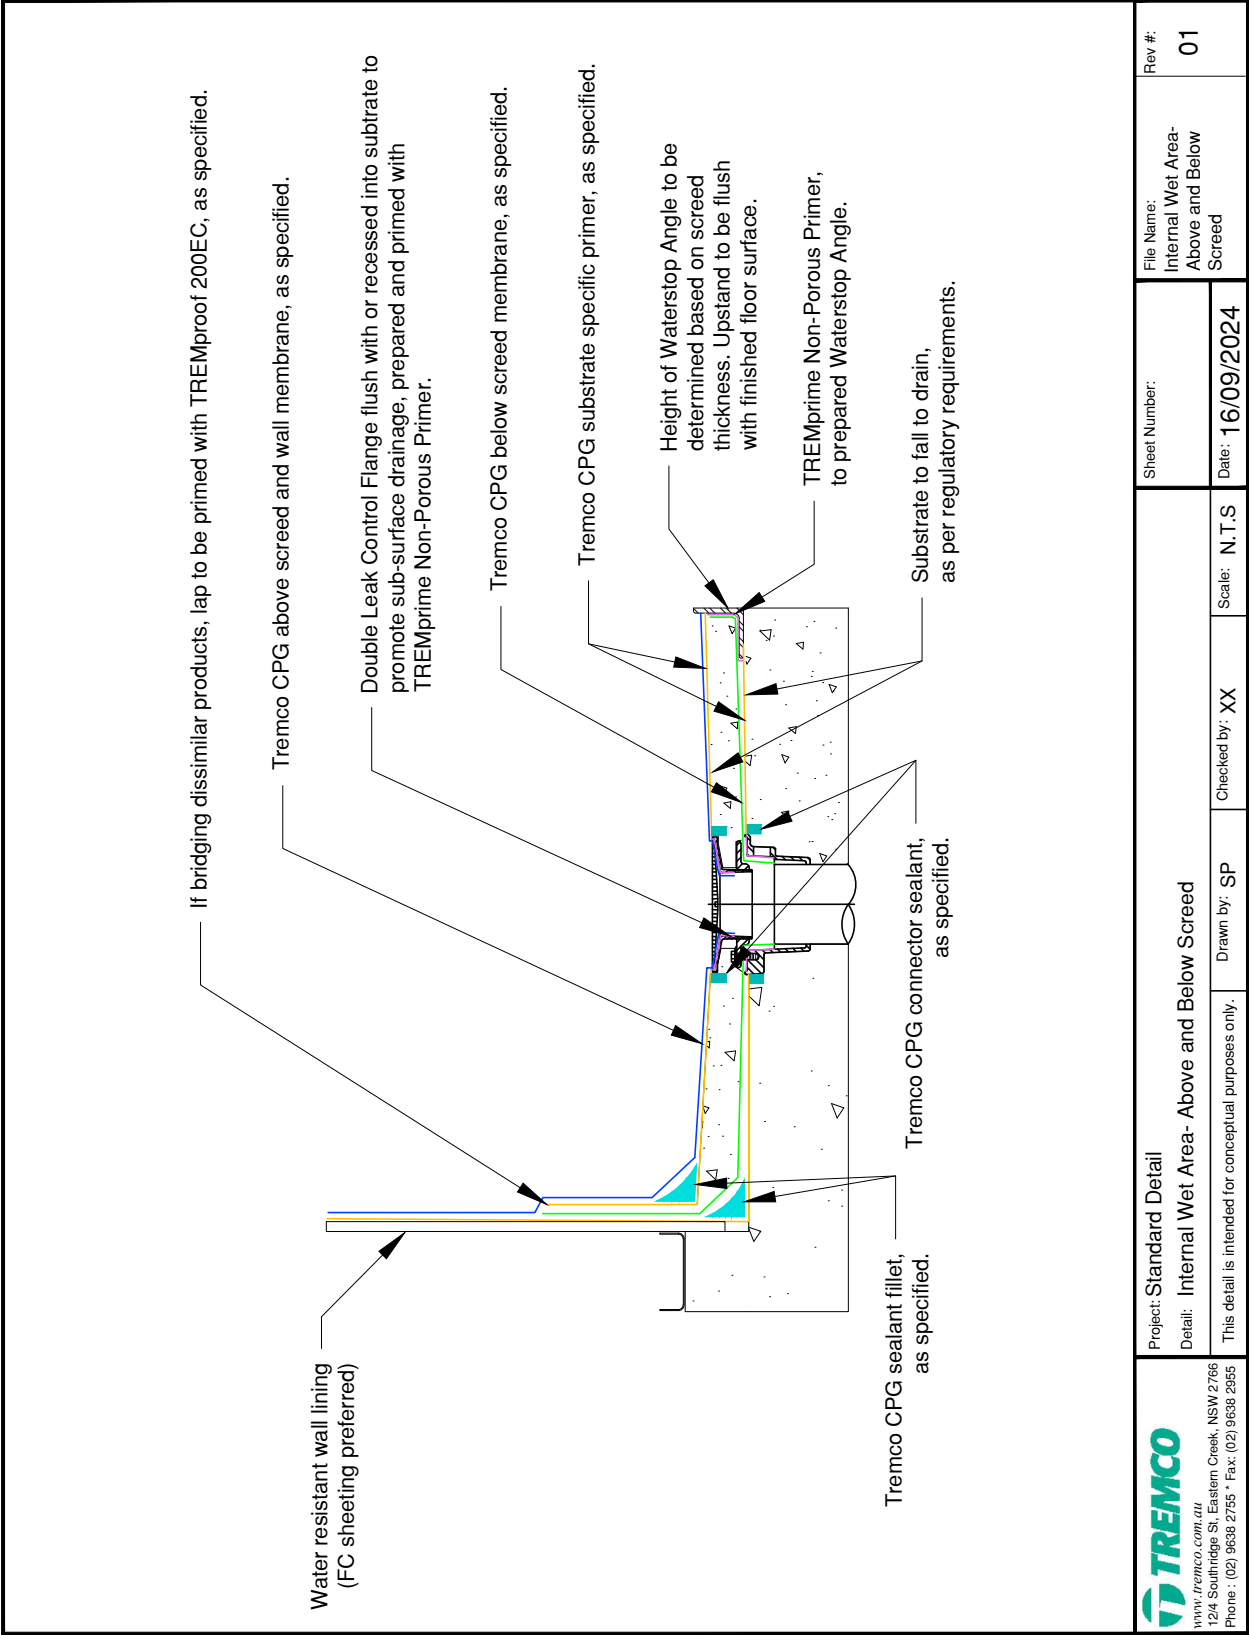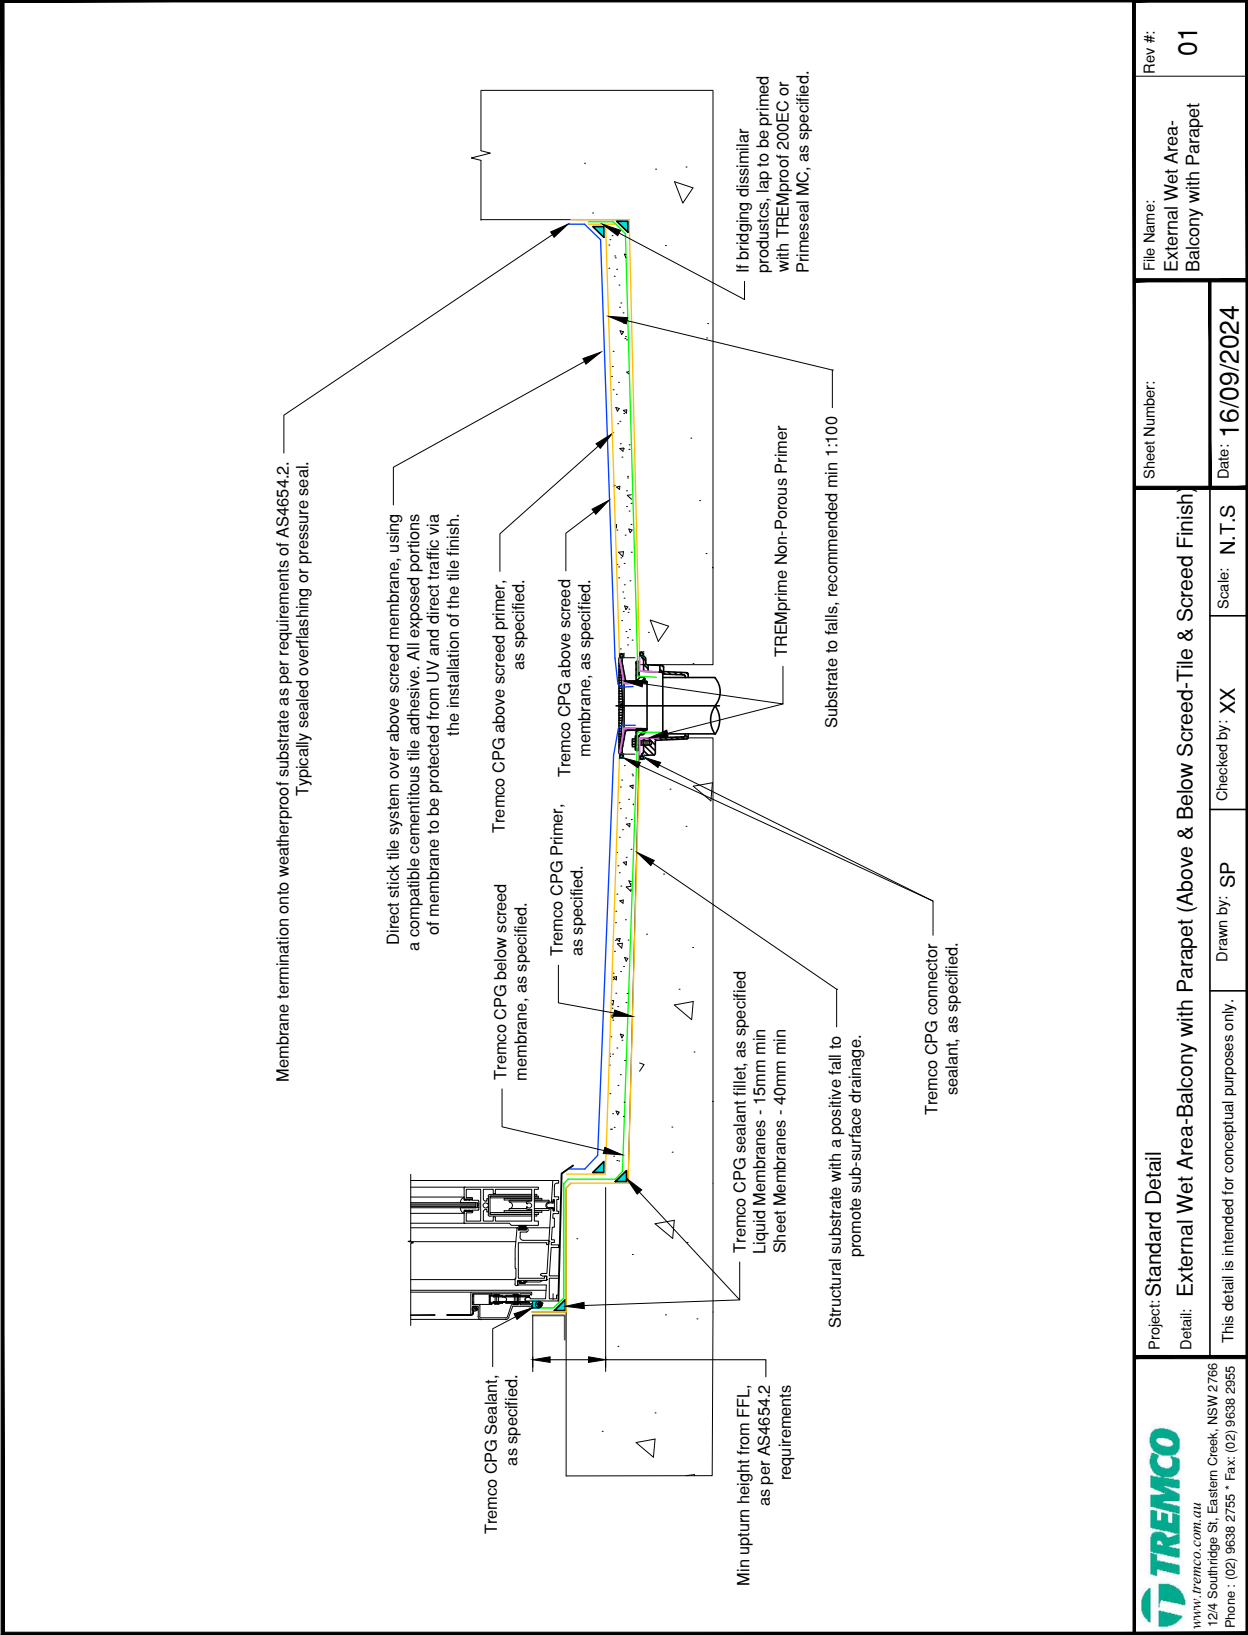

STANDARD DETAIL DRAWINGS



TREMCO'S ONLINE PRODUCT SELECTOR

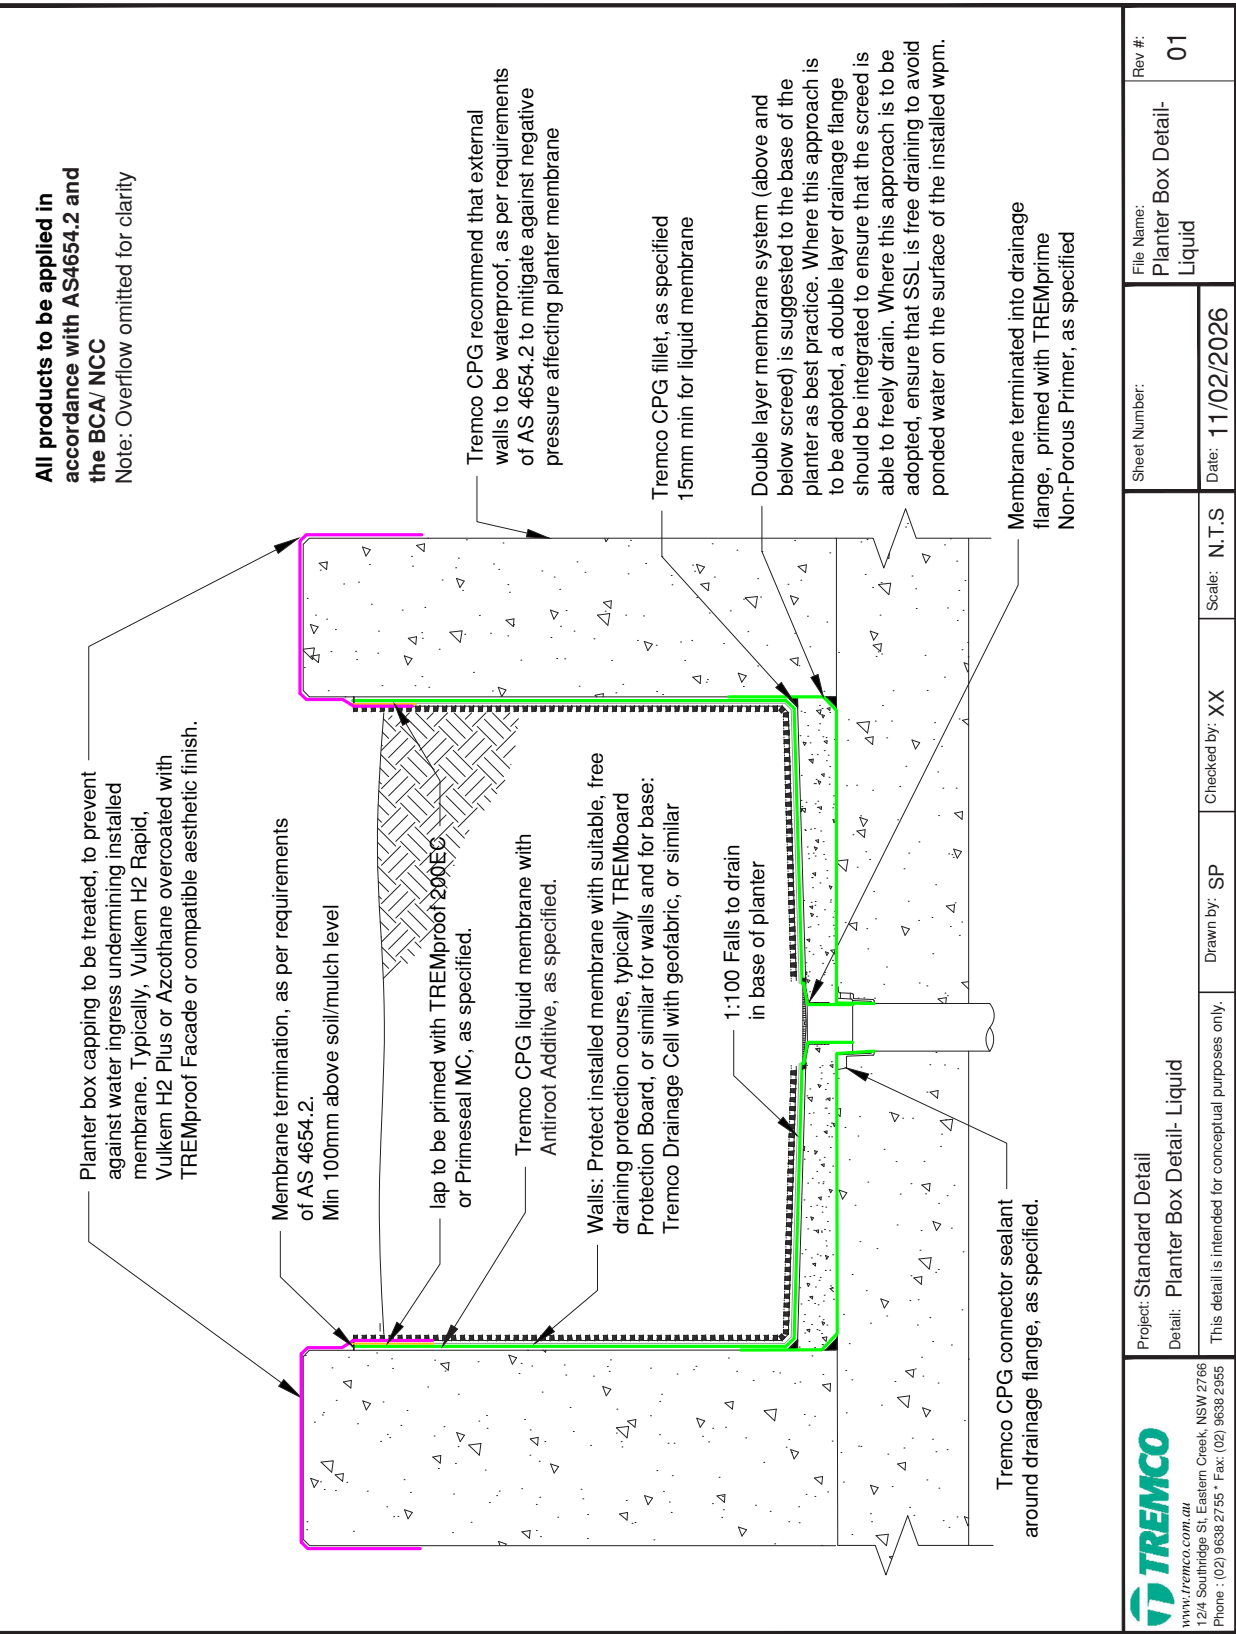

Your Gateway to Expert Recommendations

Find your perfect construction solution in just a few clicks.

How It Works

Getting the right product for your project has never been easier. Our intuitive online tool guides you through a simple, three-step process:

1. Choose Your Segment

Select from specialized categories including Waterproofing, Concrete Repair & Curing, Industrial Grouting, Fire Protection, and Vandex systems.

2. Define Your Project Requirements

Answer a few targeted questions about your specific environment, application, and project needs.


3. Get Tailored Recommendations

Receive a curated list of Tremco products perfectly matched to your requirements, complete with technical specifications and application guidance.

No technical expertise required - our tool translates your needs into professional-grade solutions.

Ready to find your solution?

Try the online product selector today!

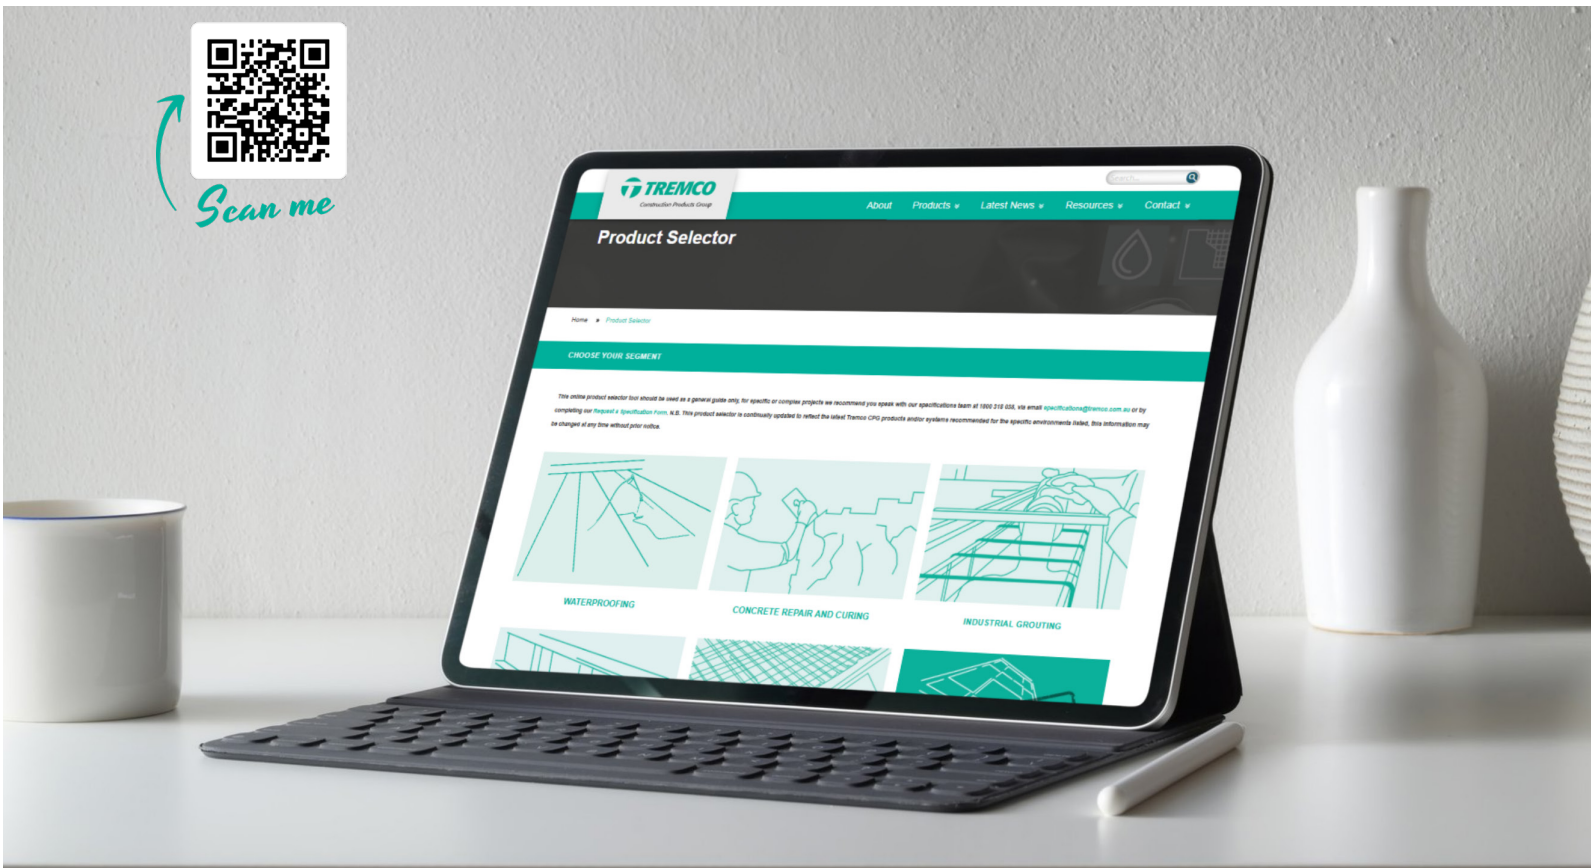

TREMCO CPG AUSTRALIA STANDARD WARRANTY



TREMCO CPG AUSTRALIA STANDARD WARRANTY



Tremco CPG Australia Standard Warranty

Tremco CPG Australia offer a ‘materials warranty’ on products supplied. This warranty covers the supplied materials as being fit for purpose and meeting the physical properties as listed on the relevant Tremco CPG Australia published literature.

Tremco CPG Australia’s warranty is offered with the expectation that all products are installed in line with Tremco CPG Australia’s published literature, the relevant Australian Standard and the National Construction Code.

Where a product failure is suspected, Tremco CPG Australia is to be contacted immediately, with a site investigation to be undertaken, in conjunction with the builder and applicator to work towards finding the absolute source and mode of failure.

Irrespective of the identified cause of the failure, while not forgoing the terms and conditions associated with Tremco CPG Australia’s ‘materials warranty’, Tremco commits to working alongside the builder and applicator to provide technical support through any remediation/ rectification works.

Please refer to the terms and conditions of this warranty for further information.



Tremco CPG Australia Standard Warranty



Tremco CPG Australia Pty Ltd ACN 000 024 064 (Tremco CPG)

Product Warranty

Warranty Owner:

Description of Site:

Warranty Number:

Products Supplied:

Warranty Commencement:

Warranty Period: TWENTY (20) Years from the date of sale of the products

Contractor:

Contract Value

Date: _____

By: _____
(on behalf of Tremco CPG Australia Pty Ltd)

Tremco CPG Australia Pty Ltd

A.B.N. 25 000 024 064

Tremco CPG Australia Pty Ltd ACN 000 024 064 (Tremco CPG)

1. WARRANTY

1.1 Tremco CPG warrants that the Tremco CPG products identified (Products) are warranted to be free from defects for the warranty period specified (Warranty) to the extent that:

a) The Product supplied has failed to perform during the warranty period in accordance with this Warranty and Tremco CPG's published specifications;

b) Provided that the Product was installed in accordance with Tremco CPG's published Technical Data Sheet (TDS) and in accordance with applicable Australian Standards and the National Construction Code (NCC); and

c) The Conditions in clause 2 have been satisfied.

1.2 Where a Product meets the requirements of this Warranty, Tremco CPG will replace the Product in its normal packaging (current at time of supply of replacement product).

1.3 The following statement applies if the supply of the Products is to a "Consumer" as defined in the Australian Consumer Law, which is Schedule 2 to the Competition and Consumer Act 2010 (Cth):

a) "Our" means "Tremco CPG";

b) "You" means the Warranty Owner; and

c) "goods" means "Products".

1.4 Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

1.5 What constitutes a major failure is set out in the Australian Consumer Law.

1.6 Notwithstanding the preceding clauses and to the extent permitted by law, the liability of Tremco CPG is limited, in relation to the Products and at the option of Tremco CPG to:

a) replacing the Products, or where the Products no longer exist, the supply of equivalent goods;

b) the repair of the Products;

c) the payment of the cost of replacing the Products or of acquiring equivalent Products; or

d) the payment of the cost of making the Products repaired.

1.7 To the extent permitted by law, all other warranties whether implied or otherwise, not set out in this Warranty are excluded and Tremco CPG is not liable in contract, tort (including, without limitation, negligence or breach of statutory duty) or otherwise to compensate the Warranty Owner for:

a) loss of revenue;

b) loss of profit or anticipated profit;

c) loss of business;

d) loss of business reputation;

e) loss of opportunities;

f) loss of anticipated savings;

g) loss of goodwill; and

h) any other loss suffered by a party as a result of a breach of this Warranty that cannot reasonably be considered to arise directly and naturally from that breach.

1.8 The benefits given to the Warranty Owner in this Warranty are in addition to other rights and remedies under a law in relation to the Products to which this Warranty applies.

1.9 This Warranty is not applicable outside Australia.

1.10 In the event of an emergency which requires immediate repair to the Tremco CPG Product to avoid substantial damage to the Tremco CPG Product, building or the building's contents, Tremco CPG may instruct the Warranty Owner to make temporary repairs.

1.11 This warranty does not apply to products which are not supplied by Tremco CPG or to applications where Tremco CPG products are combined with non Tremco CPG products.

1.12 This warranty does not apply to application or installation work.

1.13 Any attendance by Tremco CPG staff onsite before, during, or after the product application process does not extend this warranty any further than being a product warranty.

2. CONDITIONS PRECEDENT

2.1 This Warranty is subject to:

a) The builder and/or Warranty Owner providing adequate and proper surfaces for application of Tremco CPG product;

b) The builder and/or Warranty Owner selecting the applied Tremco CPG product and allowing proper curing time for the site and ambient conditions prevailing;

c) All construction being in accordance with Australian Standards and building code, as applicable.

3. EXCLUSIONS

3.1 This Warranty does not cover any failure of Tremco CPG Product as a result of:

a) damage caused by lightning, hailstorms, floods, winds of 100km/h or greater, tornadoes, earthquakes, fire;

b) failure of the Product due to external damage however caused (e.g. vandalism, animals, penetration of the Tremco CPG Product or chemical attack by outside agents);

c) any alteration or negligent act on the part of the Warranty Owner or third party, including but not limited to misuse, abuse, unreasonable use, improper treatment or failure to undertake proper maintenance;

d) poor construction, structural failure, or failure of the Product under other aspects of the building or construction in accordance with the relevant standard or building code;

e) excessive vibration, expansion or contraction of the site and/or substrate due to faulty construction or design of building components used in the site or lack of adequate drainage; or

f) installation or application of the Tremco CPG product not in accordance with the published recommendations of Tremco CPG.

4. NOTICE OF FAILURE TO REPAIR

4.1 If the Warranty is set out in Clause 1 is breached during the Warranty Period, the Warranty Owner shall, by notice in writing to the Managing Director of Tremco CPG Australia Pty Ltd, Unit 12, 4 Southridge Street, Eastern Creek, NSW 2166, notify Tremco CPG of the failure as soon as possible, and in any event within thirty (30) days of the failure being discovered.

4.2 Tremco CPG will within a reasonable time of receipt of notification of the failure, inspect the failure. If the failure is within coverage of this Warranty, Tremco CPG will, at its own expense provide replacement Tremco CPG Products in accordance with the published recommendations of Tremco CPG.

4.3 Quality control records shall be provided with any warranty claim to demonstrate that the correct materials have been used and properly applied.

5. WARRANTY VOIDED

5.1 Tremco CPG may, upon reasonable written notice to the Warranty Owner, void this Warranty for any of the following reasons:

a) Building settlement, deterioration, cracking or failure of the substrate;

b) Application or construction non-compliance;

c) Surfaces not properly primed or prepared;

d) Repairs, alterations or installation of structures or failures on, near or through the Tremco CPG Product having been conducted without approval of Tremco CPG;

e) Failure of the Warranty Owner to notify Tremco CPG within the prescribed time of discovery of the defects or failures of the Tremco CPG product;

f) Failure to repair non-warranty defects or failures according to Tremco CPG's published specifications;

g) Failure of building owner or Warranty Owner to comply with routine and necessary maintenance as prescribed in Tremco CPG's published specifications; or

h) Failure of the building owner or Warranty Owner to fully document both in date and precise terms the maintenance schedule in the with Tremco CPG's published specifications.

6. WARRANTY PERIOD

6.1 The Warranty Period for each individual Tremco CPG product shall commence from the Warranty Commencement Date being the date of the Contractor's application of that Tremco CPG product.

7. ACCESS TO SITE

7.1 During the Warranty Period and at the time of carrying out any rectification or repair under the terms of this Warranty, Tremco CPG shall be provided with free access to the site where the Tremco CPG Product is located. Where access is more complicated than it was during original application, any cost of installation and removal of any access equipment to provide access to the Tremco CPG Product location that was not required at the date of application of installing the Tremco CPG Product, shall be to the account of the Warranty Owner.

8. NON TRANSFERABLE

8.1 The Warranty Owner's rights under this warranty are not transferable.

TRAINING PROGRAMME & CPD PRESENTATIONS



TRAINING PROGRAMME & CPD PRESENTATIONS

At Tremco, we're committed to shaping the future through innovative approaches and sustainable solutions. From joint sealing, facade bonding & insulation through to passive fire protection, performance resin flooring, waterproofing and roofing solutions - our broad range makes us the ideal partner to solve the complex challenges faced by today's specification experts. Training may take place at a Tremco premises, your office or site.

Tremco also have a series of Formal CPD presentations which you can take advantage of, to help keep up to date with the latest Waterproofing and Building Codes and earn formal CPD points.

Each presentation we will provide your company with:

- Your CPD certificate for all participants
- AIA formal recognition
- Product samples for your records if requested

Register your interest in one of our approved formal CPD programs below.

- Below Grade Waterproofing: The Multi-Billion Dollar Missing Piece
- Internal Wet Area Waterproofing: 2 ½ Times More Expensive Than It Should Be
- Understanding The Thin Dotted Line That Is External Above Grade Waterproofing
- Resin Quest - A Specifier's Journey
- Intumescent Coatings for Structural Steel



1 Formal CPD Point



1 Formal CPD Point



1 Formal CPD Point

BOOK ONE OF OUR ACCREDITED CPD SEMINARS HERE



Refuel CPD Provider



Book a CPD

TRAINING PROGRAMME & CPD PRESENTATIONS




SPECIFIER TRAINING PROGRAMME

At Tremco, we're invested in the Australian construction community and that is why we have developed our Specifier Training Program. This platform enables us to share our industry knowledge and keep professionals up-to-date with the latest changes in standards, legislation, and expectations of the built environment in relation to the design and specification of Tremco systems. Take part in our Specifier Training Program modules with each module designed for Architects, Engineers, Consultants, Builders and Design professionals to enhance their knowledge and understanding of Waterproofing.

Register your interest in one of our training modules below.

- Introduction to Waterproofing
- Intricacies of Internal Wet Area Waterproofing
- Intricacies of External, Above Ground Waterproofing
- Below Grade Waterproofing and BS 8102

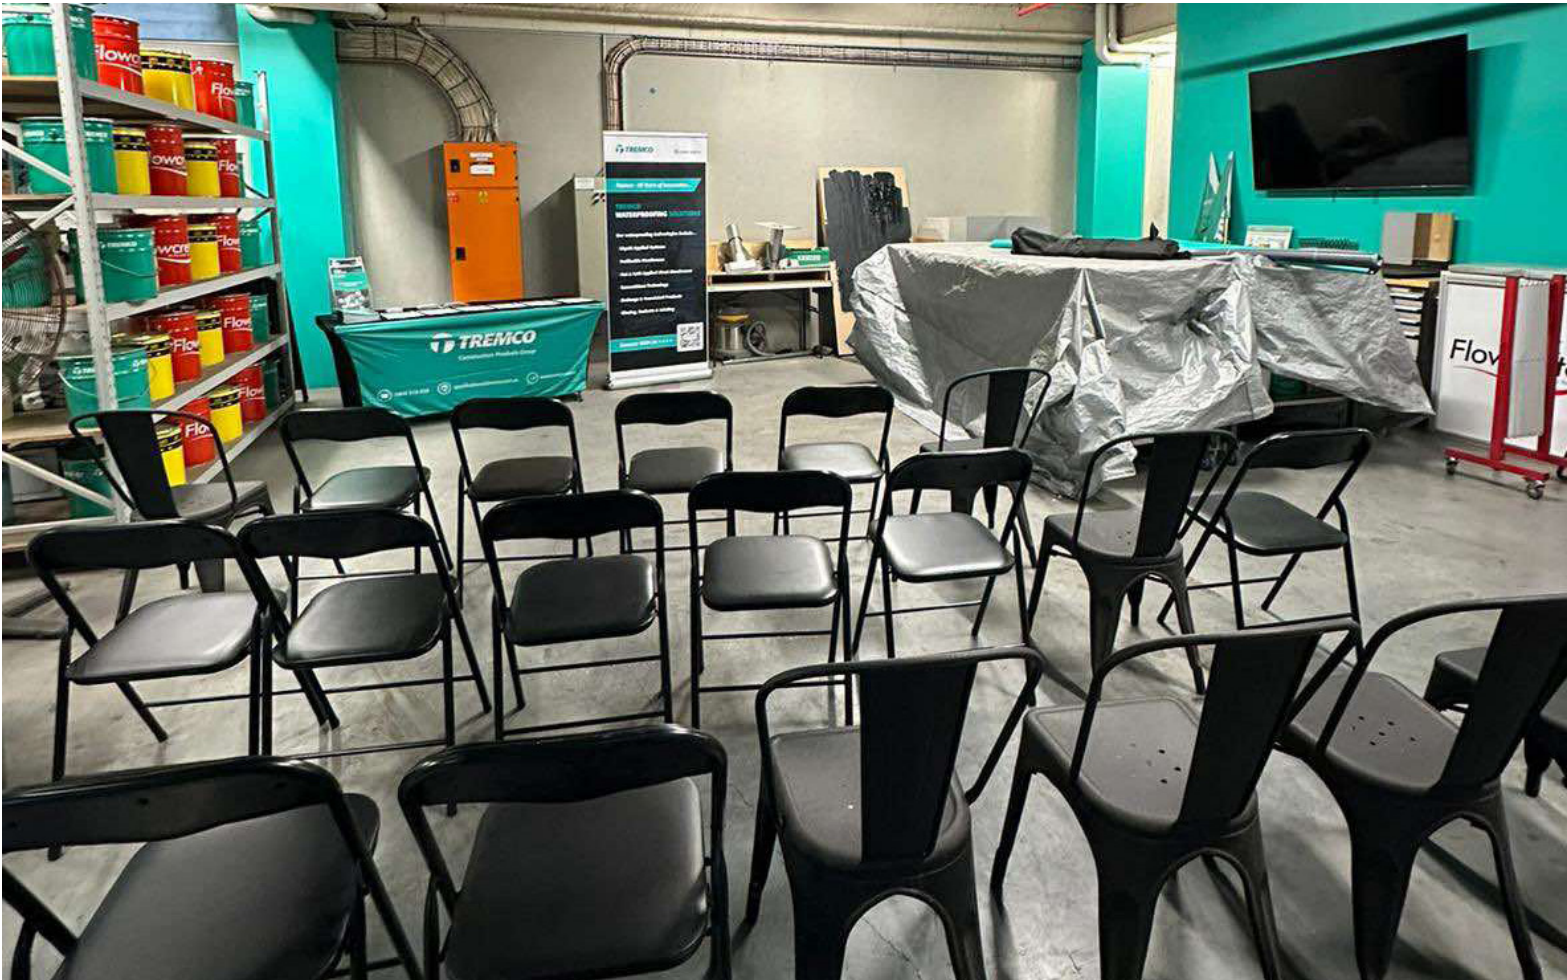

Tremco Construction Products Group (CPG) represents the combined power of brands including Tremco, Duram, Flowcrete, Willseal, illbruck, Nullifire, and Euclid Chemical.

Our products and services empower teams to develop, design, restore and engineer structures that are more efficient to build and maintain, are virtually impervious to the elements and can provide any look desired.

Ph: 1800 318 038

www.tremco.com.au

